


## Petrol-TM

- Application:** Transfer of oil, gasoline, diesel fuel, and other petroleum products
- Lining:** polypropylene fabric, film and polyester barrier layers
- Reinforcement:** High tensile strength galvanized inner and outer wire
- Cover:** Elastothane abrasion resistant PVC impregnated fabric
- Temperature:** -22°F to +212°F
- Flange:** Fix x floating Carbon Steel

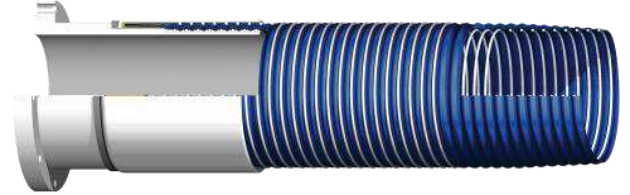

PART #	ID	WP	BURST	WEIGHT	Standard Length
	in	psi	psi	lbs/ft	FT
PETROL-COMP-200	2	250	1000	1.5	20
PETROL-COMP-300	3	250	1000	3	20
PETROL-COMP-400	4	250	1000	5.25	10/20
PETROL-COMP-600	6	250	1000	8.25	10/20/25
PETROL-COMP-800	8	250	1000	14.55	10/20/25
PETROL-COMP-10	10	250	1000	17.80	10/20/25
PETROL-COMP-12	12	250	1000	21.10	10/20