


# 2" Elima-Matic Bolted Non-Metallic with Metallic Center Section

# E2

## Performance

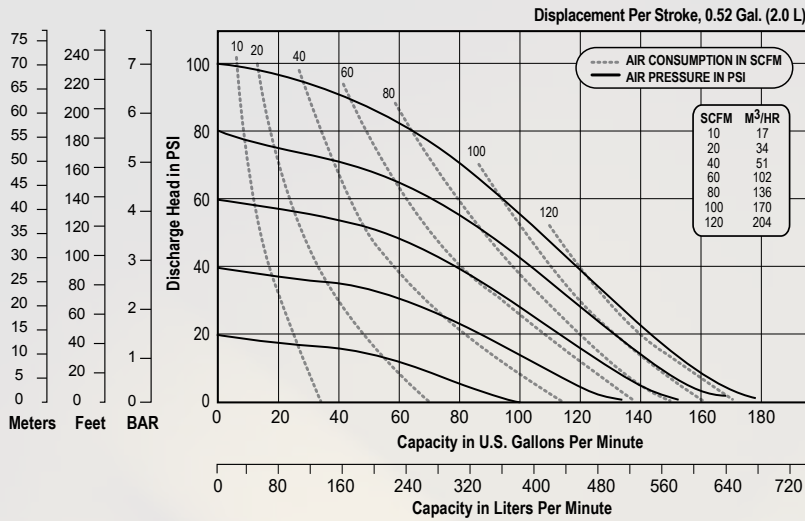

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-177 gpm (670 lpm)

### Port Size

Suction . . . . . 2" ANSI, 150 Class (DIN 50)

Discharge . . . . . 2" ANSI, 150 Class (DIN 50)

**Air Inlet** . . . . . 1/2" NPT

**Air Exhaust** . . . . . 1" NPT

### Suction Lift

Dry . . . . . 16' (4.9 m)

Wet . . . . . 32' (9.8 m)

### Max Solid Size (Diameter)

. . . . . 1/4" (6.3 mm)

**Max Noise Level** . . . . . 96 dB(A)

### Shipping Weights

Polypropylene . . . . . 69 lbs (31.3 kg)

w/ center port options . . . . . 73 lbs (33.1 kg)

PVDF . . . . . 93 lbs (42.2 kg)

w/ center port options . . . . . 100 lbs (45.4 kg)

## Dimensions

