


# 3" Elima-Matic Bolted Metallic

with Metallic Center Section

# E3

## Performance

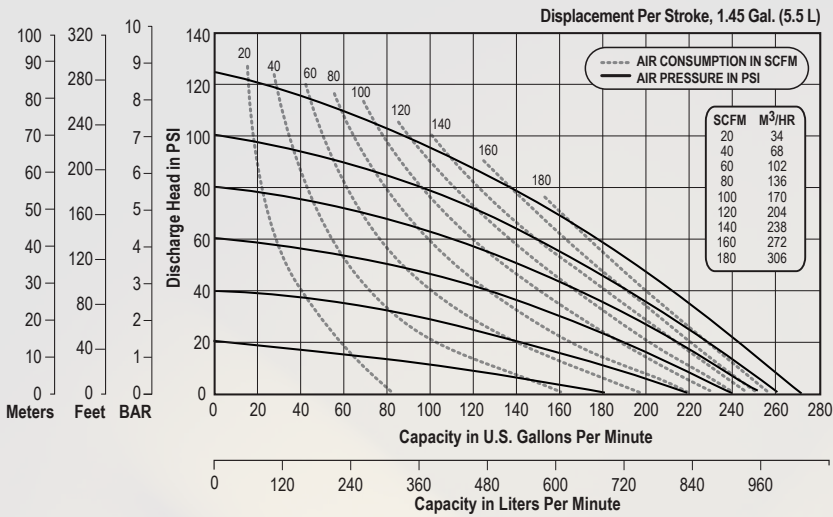

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-273 gpm (1,033 lpm)

### Port Size

Suction . . . . . 3" ANSI 150 lbs Class (DIN80)

Discharge . . . . . 3" ANSI 150 lbs Class (DIN80)

**Air Inlet** . . . . . 1/2" NPT

**Air Exhaust** . . . . . 1" NPT

### Suction Lift

Dry . . . . . .16' (4.9 m)

Wet . . . . . .31' (9.4 m)

### Max Solid Size (Diameter)

. . . . . 3/8" (9.5 mm)

### Max Noise Level . . . . . 93 dB(A)

### Shipping Weights

Stainless . . . . . 245 lbs (111.1 kg)

\*\* Stainless Center add . . . . . 50 lbs. (22.7 kg)

## Dimensions

